

New Retransfer Printer.



New Trusted Identity Begins

SMART-81DL is a next generation retransfer card printer that offers the industry's fastest first-card-out speed. IDP's innovative retransfer heating technology- RapidRetransfer Printing technology or "RRP" provides the fastest "Ready to Print" metric in the industry. No more waiting several minutes for your outdated retransfer printer to heat up.

RRP technology from IDP offers power-on and Ready to Print in only seconds. The SMART-81DL produces higher quality, laminated (custom or clear lamination available), sharper-looking images than traditional card printers. It is the perfect choice for demanding applications that require deep dark colors with infinity-edge (full-bleed) graphics on blank or technology cards.

The input card hopper holds up to 200 cards and physical security features allow you to secure your printer, its supplies, and ejected cards in instant bank card issuance or high-security applications.

Features

- The FASTEST First-Card-Out speed
- High-Security Holographic Laminate
- High Volume Capacity (200 cards)
- Infinity Edge / Over the Edge Printing
- Patch or Edge-to-Edge Laminating
- Advanced Bank Card Issuance Security
- Robust & Innovative Product design



Issuance

SMART IDesigner ensures accurate card issuance and data management with your SMART series of printers. This application offers simple design tools to allow the user to create a truly customized card within minutes. SMART IDesigner offers advanced user tools such as database connections, camera and signature scanners, plug-in support, as well as smart card reading and encoding.

- Design and print (Image, Photo, and Text)
- 1D & 2D Barcode printing
- Auto portrait (Auto face detection, adjustment of size & position)
- Printing of sequential numbers
- Card design templates
- Plug-in for supporting external devices (Sign pad, Camera, Scanner)
- Convenient card issuance and data management
- Magnetic stripe (MS), contact & contactless smart card encoding by using a plug-in program

Security

The SMART series printers come with highly effective and tested physical and electronic security features.

- PASSWORD verification with administrator and user authentications
- PC AUTHENTICATION locks the SMART printer to a specific PC to render it useless if stolen
- DATA ENCRYPTION over USB and SSL (secure socket layer) over Ethernet
- PHYSICAL LOCKS are standard on the SMART-70 and an optional feature on the SMART-51 Series
- Ethernet - SNMPv3

Networking

The SMART series offers "single-wire" printing and encoding.

- The SMART Ethernet module can not only print over your network, but can also be configured to encode a magnetic stripe, contact IC chips, and contactless smart cards over your network
- The SMART Ethernet module can be configured to accept "open card protocol" print commands for direct printing without a driver

Printing

Print Type	Dye-Sublimation / Resin Thermal Retransfer
Print Area	Edge-to-Edge
Resolution	300dpi / 600dpi

Print Speed

YMCKK	Max. 43 sec./card (84 cards/hour)
YMCKK/Laminating	Max. 51 sec./card (71 Cards/hour)

System

Display	2 Line Graphic LCD Indicator / 4 Buttons
Supported Platforms	Microsoft Windows 2000/2003/XP/Vista/7/8/10, Mac OS, Linux
Communication	USB, Ethernet
Power Supply	100-240V~50/60Hz 2.5A
Temperature/Humidity	15~35°C/35~70%

Laminating

Type	Direct Heating Lamination
Film (clear & holographic)	0.6mil, 1.0mil
Speed Simultaneous (Single Lamination)	20 sec. / card (180 cards / hour)
Interface	1 LED indicator

Card

Card Feeding	Automatic
Card Size	ISO CR80 (54mm x 86mm/2.12" x 3.38")
Card Thickness	0.76mm (30mil) ~ 1.6mm (64mil)
Card Type	PVC, PET, Composite PVC

Capacity

Input Hopper	200 Cards
Output Hopper	100 Cards

Dimensions

Millimeter (WxDxH)	(Printer) 460 x 224 x 310 (Laminator) 240x224x260mm
Inch (WxDxH)	18.1 x 8.8 x 12.2

Weight

Kg/lbs	(Printer) 11.4 / 25.13 (Laminator) 6.2 / 13.7
--------	---

Encoding Options

Magnetic	ISO 7811 (Track I, II, III Read/ Write, HiCo/ LoCo)
Contact	ISO 7816 (ID-1)
Contactless	ISO 14443 (Type A/ B), ISO 18092(NFC), MIFARE, DESFIRE
Security	Physical & Electronic Locking System

Certifications



Consumables




Color Ribbons

YMCK	YMCKK
Full Color Ribbon with Resin Black	Full Color Ribbon with Resin Black & Resin Black for Back Side
500 Cards/Roll	500 Cards/Roll



Retransfer Film

Retransfer Film
500 Cards/Roll

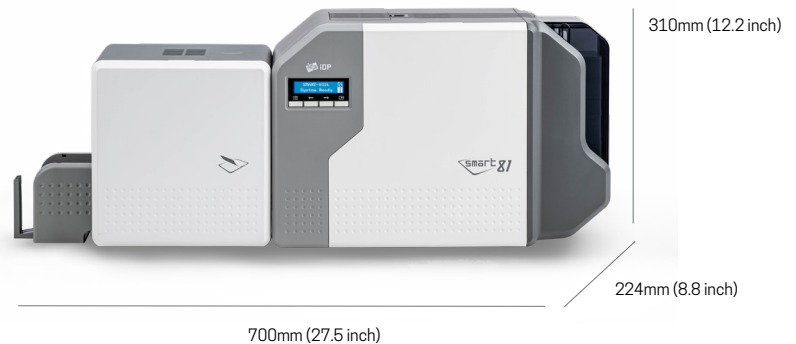

IDP Americas, Inc.

1485 South County Trail - Unit 306,
East Greenwich, RI 02818
TEL +1.401.400.7111
FAX +1.401.667.7445
E-MAIL sales@idpamericas.com

IDP Corp., Ltd.

#601, 50, Digital-ro 33-gil,
Guro-gu, Seoul, Korea, 08377
TEL +82.2.6099.3700
FAX +82.2.6099.3717
E-MAIL sales@idp-corp.com

SMART-81D	653636
Contactless Enc. (USB)	653540
Contact IC Enc.	653539
Mag Encoding	653538
YMCK & Retransfer Film Pack	653547
YMCKK (no film included)	653378
Retransfer INTM Film	653431
Clear 1mil Laminate Film	653629
Celestial Hologram 1 mil Film	653630
Clear IC Chip, 1mil Film	653631

Add "K" to any printer part number for a kit (1 YMCKO Ribbon, 1-100pk Cards, & 1 Long Cleaning Card)

*Warranty: IDP printers and options are warranted against manufacturer defects for up to 3 years and print heads for up to 2 years with unlimited prints. Additionally, IDP offers a 3-Year Advance Exchange warranty within the continental USA. Contact IDP for more details.

www.idp-corp.com